

# PROFESSIONAL GRADE MEDIUM THROW DEEP BASS SUBWOOFER OPTIMISED FOR SEALED OR PORTED ENCLOSURES



UPC: 685757152808  
 EAN: 0685757152808  
 Printed: 685757152808



## DETAILED TECHNICAL DATA

Power Handling (Per Driver):	2000 WRMS (@0%Thd)
Nominal Impedance:	2+2 ohm
DC Impedance :	1.8+1.8 ohm
Voice Coil:	76.5 mm
Voice Coil Layers :	8 Flat Wire
Magnet:	190 mm x 50 mm
Magnet Type:	Y38 Ferrite

## BOX COMPATIBILITY

Recommended Box Type:	Sealed/Ported
Recommended Box Size:	60>100Litres
Optimal Frequency Response:	20>80Hz
Recommend Port Cross Sectional Area (CSA):	25"2>50"2
Recommended Tuning Frequency:	25>40Hz

## INSTALLATION POINTS

Failure to observe any of these installation points will invalidate your warranty:

- Do not run this subwoofer infinite baffle.
- Ensure your enclosure is within the specification listed.
- Only use correctly rated non-combustible cables.

## TEAM TIPS


- We recommend to put all subwoofers in your system in a box with a shared air space.
- We do not recommend to run dual coil woofers from separate mono channels or amplifiers. This also applies (but less so) to single coil speakers in the same enclosure air space run from separate mono channels. We always recommend the use of a larger amplifier when possible in this case.
- For setting subwoofers it is possible to make a useful DIY clip detector. Wire an old tweeter and high voltage capacitor (we recommend a 250V 6.8uF) in line with the subwoofer. Next, play a 50Hz tone. Turn the gain up slowly until the tweeter makes a distinctive metallic rasp then back the gain off a small amount until the tweeter stops making the noise. Only use a tweeter you do not need as this can damage the tweeter.

## TS PARAMETERS

Name	Value	Unit	Note
RE	3.78	OHM	Electrical voice coil resistance at DC
KRM	0.0047	OHM	Wright inductance model
ERM	0.92		Wright inductance model
KXM	0.0301	OHM	Wright inductance model
EXM	0.79		Wright inductance model
CMES	782.47	UF	Electrical capacitance representing moving mass
LCES	32.04	MH	Electrical inductance representing driver compliance
RES	79.74	OHM	Resistance due to mechanical losses
FS	31.8	HZ	Driver resonance frequency
MMS	328.518	G	Mechanical mass of driver diaphragm assembly including air load and coil
MMD	302.745	G	Mechanical mass of voice coil and diaphragm without air load
RMS	5.266	KG/S	Mechanical resistance of total driver losses
CMS	0.076	MM/N	Mechanical compliance of driver suspension
KMS	13.1	N/MM	Mechanical stiffness of driver suspension

Name	Value	Unit	Note
BL	20.49	N/A	Force factor BL product
LAMBDA	-0.004		Suspension creep factor
QTP	0.652		Total Q factor considering all losses
QMS	12.461		Mechanical Q factor of driver in free air considering RMS only
QES	0.591		Electrical Q factor of driver in free air considering RE only
QTS	0.564		Total Q factor considering RE and RMS only
VAS	69.8503		Equivalent air volume of suspension
MQ	0.365	%	Ref. efficiency [2 PI radiation using RE]
LM	87.82	DB	Sound pressure level [SPL at 1M for 1W @ RE]
LMOM	88.07	DB	Nom. sensitivity [SPL at 1M for 1W @ ZN]
RMSE Z	3.42	%	Root mean square fitting error of driver impedance Z[F]
RMSE HX	4.81	%	Root mean square fitting error of transfer function HX[F]
SD	804.25	CM2	Diaphragm area
XMAX	28	mm	Total linear movement

## Frequency VS impedance

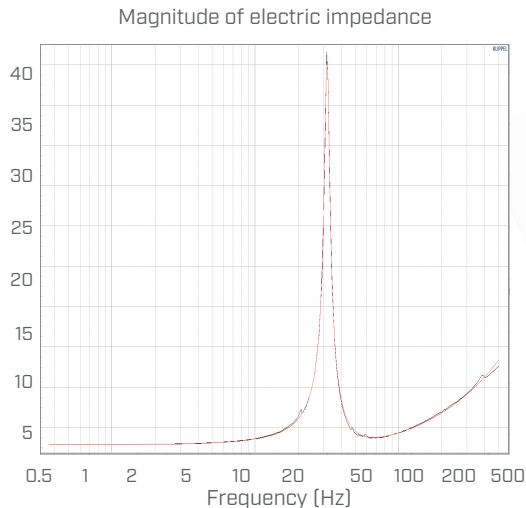

## TECHNICAL DRAWING

Total Diameter:	392 mm	Mounting Depth:	195 mm
Weight Approx. (Per a Driver):	12.9 Kg	Mounting Diameter:	358 mm

