

QUALITY BUILT HIGH SPL MIDRANGE OPTIMISED FOR CUSTOM INSTALLATIONS



UPC: 680044778587
 EAN: 0680044778587
 Printed: 680044778587



DETAILED TECHNICAL DATA

Power Handling (Per Driver):	150 WRMS (@0%Thd)
Nominal Impedance:	4 ohm
DC Impedance:	3 ohm
Voice Coil Diameter:	38.5 mm
Voice Coil Layers:	2 layer
Magnet:	120*15mm
Magnet Type:	Y30 Ferrite

INSTALLATION POINTS

Failure to observe any of these installation points will invalidate your warranty:

- Ensure you use the correct crossover points.
- Only use correctly rated non-combustible cables.
- Pay close attention to ensure you have the correct phase when installing the new drivers especially with factory wiring.

TEAM TIPS


- To get the best results from your installation apply deadening and sound insulation material to the install locations.
- To improve the midbass response locate all locate the speakers as close together as possible.
- For improved overall performance ensure the install location is well braced with no flex. If required use mdf speaker rings.

TS PARAMETERS

Name	Value	Unit	Note
RE	3.000	OHM	Electrical voice coil resistance at DC
LE	0.053	OHM	Frequency independent part of voice coil inductance
L2	0.317	OHM	Para-inductance of voice coil
R2	1.900		Electrical resistance due to eddy current losses
CMES	281.670	UF	Electrical capacitance representing moving mass
LCES	5.030	MH	Electrical inductance representing driver compliance
RES	34.410	OHM	Resistance due to mechanical losses
FS	133.700	HZ	Driver resonance frequency
MMS	10.718	G	Mechanical mass of driver diaphragm assembly including air load and coil
MMD	8.783	G	Mechanical mass of voice coil and diaphragm with out air load
RMS	1.106	KG/S	Mechanical resistance of total driver losses
CMS	0.132	MM/N	Mechanical compliance of driver suspension
KMS	7.560	N/MM	Mechanical stiffness of driver suspension

Name	Value	Unit	Note
BL	6.168		Force factor BL product
LAMBDA	0.085		Suspension creep factor
QTP	0.661		Total Q factor considering all losses
QMS	8.138		Mechanical Q factor of driver in free air considering RMS only
QES	0.711		Electrical Q factor of driver in free air considering RE only
QTS	0.653		Total Q factor considering RE and RMS only
VAS	3.8361		Equivalent air volume of suspension
MQ	1.239	%	Reference efficiency (2 PI radiation using RE)
LM	93.130	DB	Sound pressure level (SPL at 1M for 1W @ RE)
LMOM	94.380	DB	Nominal sensitivity (SPL at 1M for 1W @ ZN)
RMSE Z	2.280	%	Root mean square fitting error of driver impedance Z(F)
RMSE HX	1.340	%	Root mean square fitting error of transfer function HX(F)
SERIES RESISTOR	0.000	OHM	Diaphragm area
SD	143.140	CM2	Diaphragm area

SPL VS FREQUENCY

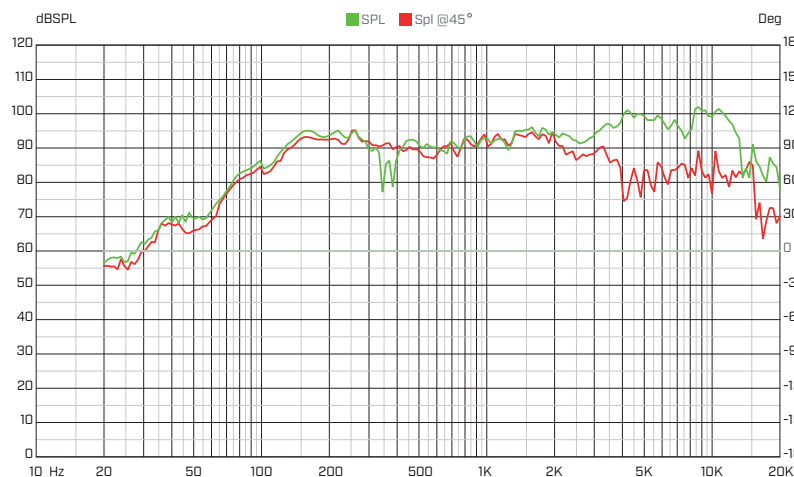

TECHNICAL DRAWING

Mounting Depth:	76mm
Mounting Diameter:	144mm
Total Diameter:	167mm
Weight Approx. (Per a Driver):	1.77Kg

