

QUALITY BUILD MODULAR FULL RANGE SPEAKER SYSTEM OPTIMIZED FOR OE SOUND UPGRADE

Indy X69 BASSFACE

WOOFER SPECIFICATION

Voice Coil Diameter:	25.5mm
Voice Coil Layers:	2 layers
Winding Material:	KSV
Cone :	Injection PP
Surround:	Rubber
Magnet:	100X18mm
Magnet Type:	Y30 Ferrite

INSTALLATION POINTS

Failure to observe installation points will invalidate your warranty:

- Remember that power handling is directly linked to the high pass crossover used. To push more power you must raise crossover frequency at the expense of fidelity. This is particularly true for smaller drivers.
- Pay close attention to ensure you have the correct phase when installing the new drivers especially with factory wiring.

TS PARAMETERS

Name	Value	Unit	Note
RE	3.6	OHM	Electrical voice coil resistance at DC
LE	0.3	mH	Frequency independent part of voice coil
FS	85	HZ	Driver resonance frequency
MMS	16.8	G	Mechanical mass of driver diaphragm assembly including air load and coil
MMD	17.4	G	Mechanical mass of voice coil and diaphragm with out air load
CMS	0.25	MM/N	Mechanical compliance of driver suspension

DETAILED TECHNICAL DATA

Power Handling (Per Driver):	2x80 WRMS (@0%Thd)
Nominal Impedance:	4 ohm
Sensitivity:	91 dB
Frequency Range:	55Hz-22KHz
Recommend HI Pass crossover:	5KHz
Speaker Type:	2-Way



TWEETER SPECIFICATION


Voice Coil Diameter:	20.4mm
Voice Coil Layers:	2 layers
Winding Material:	ASV
Diaphragm Material	Silk
Magnet:	19.5x3 mm
Magnet Type:	N38 NEO

TEAM TIPS

- To get the best results from your installation apply deadening and sound insulation material to the install locations.
- To improve the midbass response locate all locate the speakers as close together as possible.
- For improved overall performance ensure the install location is well braced with no flex. If required use mdf speaker rings.

Name	Value	Unit	Note
BL	4.4	N/A	Force factor BL product
QMS	3.26		Mechanical Q factor of driver in free air considering RMS only
QES	1.51		Electrical Q factor of driver in free air considering RE only
QTS	1.03		Total Q factor considering RE and RMS only
SD	218.9	CM ²	Diaphragm area

SPL VS FREQUENCY

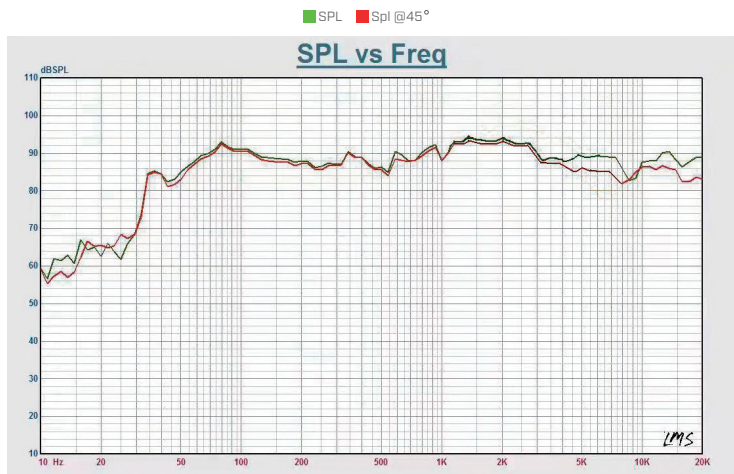

TECHNICAL DRAWING

Mounting Depth:	82mm
Mounting Diameter:	218X152mm
Total Diameter:	256X181mm
Weight Approx. (Per a Set):	3Kg

